

Research Article

Andras Jozsef Toth*, Eniko Haaz, Tibor Nagy, Ariella Janka Tarjani, Daniel Fozér, Anita Andre, Nora Valentinyi, Szabolcs Solti, Peter Mizsey

Treatment of pharmaceutical process wastewater with hybrid separation method: distillation and hydrophilic pervaporation

<https://doi.org/10.1515/wtr-2018-0002>

received November 10, 2017; accepted December 5, 2017

Abstract: The work is motivated by an industrial problem, which is alcohol removal from pharmaceutical process wastewater. The aim of the study was to develop a complete hybrid operation is investigated. Ethanol dehydration, in combination with distillation and hydrophilic pervaporation, is used to investigate about the extent of separation of the ethanol-water mixture. The aim of this research is to rigorously model and optimize this hybrid operation in professional flowsheet simulator environment. The number of minimal theoretical plates of distillation column and minimal effective membrane transfer area are determined. Cost estimation is also examined according to Douglas methodology. Considering our results it can be concluded that, the distillation and hydrophilic pervaporation processes are suitable for separation ethanol and water in 99.5 weight percent purity.

Keywords: process wastewater, ethanol dehydration, hybrid operation, distillation, hydrophilic pervaporation

*Corresponding author: Andras Jozsef Toth, Environmental and Process Engineering Research Group, Budapest University of Technology and Economics, H-1111, Hungary, Budapest, Műegyetem rkp. 3, E-mail: andras86@kkft.bme.hu

Eniko Haaz, Tibor Nagy, Ariella Janka Tarjani, Daniel Fozér, Anita Andre, Nora Valentinyi, Environmental and Process Engineering Research Group, Budapest University of Technology and Economics, H-1111, Hungary, Budapest, Műegyetem rkp. 3.

Szabolcs Solti, Szelence Kamionmosó, Ipartelep, H-2431, Szabade-gyháza, Hungary

Peter Mizsey, Department of Fine Chemicals and Environmental Technology, University of Miskolc, H-3515, Hungary, Miskolc, Egye-temváros C/1 108.

1 Introduction

Pervaporation (PV) is a chemical unit operation where the mixture to be separated is vaporized at low pressure on the downstream side of the membranes and the separation of the mixtures takes place by preferential sorption and diffusion of the desired component through the dense membranes. One way of achieving the difference in the partial pressures is to maintain a low vapor pressure using a vacuum pump on the permeate side [1, 2]. Pervaporation is a relatively new technology for the separation of many organic solvent/aqueous mixtures. In recent years, the number of publications, books, and industrial applications of pervaporation have been steadily increasing, pointing to the increasing importance of this unit operation pervaporation as a membrane separation method [3-6]. Pervaporation has the several advantages in comparison to other/conventional separation techniques. These advantages include: a higher separation effect/efficiency, simple actualization, no-pollution and lower energy demand. Pervaporation can have advantages over distillation because of its lower energy demand and the ability to separate azeotropic mixtures.

The separation process of the pervaporation is determined by the selective sorption, solution and diffusion in the membrane. This process is mainly used for dehydration of organics [7-9], removal of low concentration organics from its aqueous mixtures [10-12] and organic-organic separation [13-15]. Depending on the permeating component two main types of pervaporation can be identified: hydrophilic and organophilic (hydrophobic) pervaporation [16-18].

The first commercial plants for dehydration of alcohol with PV were installed in the late 1980s. While for environmental application organophilic PV with hydrophobic membranes has the highest potential by offering the opportunity to efficiently remove low concentration of organic compounds from wastewater [11]. The first commercial application of such

a process was reported in 1997 [19]. Separation of organic compounds from water has received less attention [11]. Among the major applications of pervaporation membrane processes, organic separation from organic/water mixtures is becoming more and more important [20]. The removal of organics from aqueous solutions is of particular interest for water recycling processes, fermentation, and the treatment of wastewater [21-24].

For removal of volatile organic compounds (VOCs), other separation technologies such as distillation, liquid-liquid extraction, absorption on carbon and air stripping are not applicable because of feed condition limitations, large volume of by-products or high cost of post-treatments. However, pervaporation can be applied without these limitations [25]. Generally, distillation can be used to remove organic compounds from water [26]. In the case of thermally sensitive organic compounds, however, distillation can not be applied. Furthermore, according to Fleming and Slater [27, 28], pervaporation has several advantages over traditional distillation: (1) reduced energy demand because only the permeating fraction of the liquid should be vaporized, (2) membrane pervaporation has advantages over distillation for liquid separations because of lower operating temperatures, (3) azeotropes can be separated [29], (4) the addition of an extra component is not required to achieve separation (as in extractive and azeotropic distillation [30]) (4). Thus, relatively mild operation conditions and high effectiveness make pervaporation an appropriate technique for such separations [27, 31, 32].

Water/alcohol separation is a well-known example of pervaporation process in chemical industry [33, 34]. Although some references reported that pervaporation

technology used for separating ethanol (EtOH)/water mixture on an industrial scale, there are virtually no studies on the application on separating methanol/water mixtures. EtOH forms minimal boiling azeotropic mixture with water, which poses a separation problem. Alcohol content above 96 weight% can not be achieved with conventional distillation techniques [35]. If the azeotropic composition can be approached with distillation, then the distillate product (D) can be further purified using hydrophilic pervaporation.

It can be seen that pervaporation is considered a competitive separation alternative for distillation. The aim of this study is to separate the EtOH/water mixture with combination of distillation and hydrophilic pervaporation with rigorous modelling in professional flowsheet environment and to obtain conclusion if the separation can be completed and under what circumstances [36]. These combined separation is called hybrid operations.

2 Material and methods

In the pharmaceutical industry it is an actual problem that ethanol (EtOH) should be separated from an aqueous mixture [37]. Process wastewater from pharmaceutical industry has to be separated with the following initial composition: 30 % (m/m%) ethanol and 70 m/m% water. The product purity is 99.5 m/m% in both cases and 800 kg/h PWW must be treated. ChemCAD professional flowsheet simulator is used for the investigation of hybrid separation. The complex separation process can be seen in Figure 1.

In the first step, PWW is pumped into the middle of the distillation column and hydrophilic pervaporation

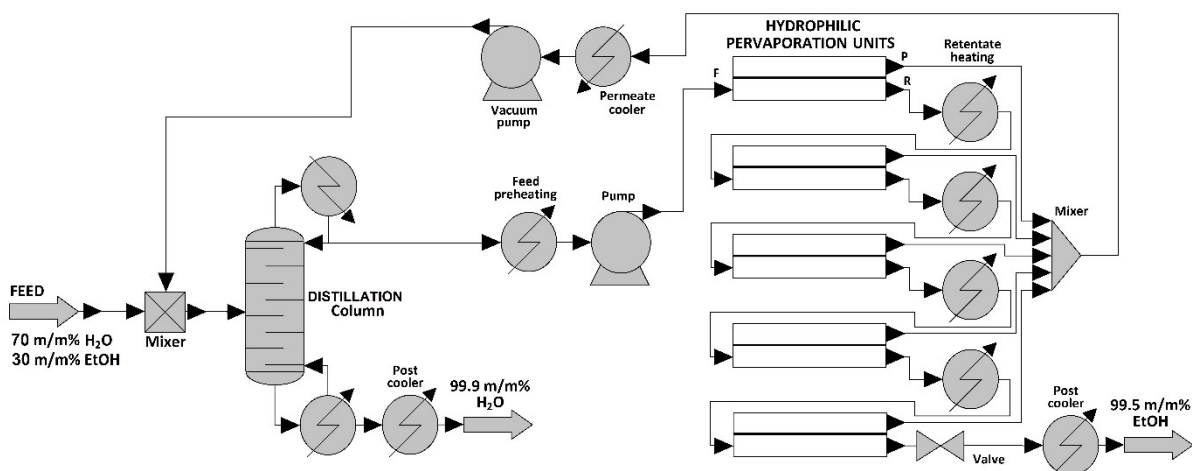


Figure 1. Flowsheet of ethanol-water separation with distillation and hydrophilic pervaporation

separates further the alcohol-rich intermediate product. Water of sufficient purity can be collected as bottom product (W) of distillation. This is actually the purified process wastewater. The alcohol substance can be obtained using this hybrid method as retentate (R) of hydrophilic pervaporation.

Additional apparatuses are also needed for pervaporation process [36]. The temperature and the pressure must be increased for the operational level prior to the first membrane unit, because the feed (F) has atmospheric conditions, 20°C and 1 bar. Heat exchanger adjusts the temperate and pump increases the pressure prior to the first PV unit, too. Retentate stream is reheated after each membrane unit by further heat exchangers [38], except for the last module. The applied membrane area per unit should be limited to a site that ensures an acceptable temperature drop. The pervaporation stops, if the temperature decreases below 50°C [36, 39].

Permeate (P) streams leaving the pervaporation units are collected, mixed, condensed with cooler and its pressure is increased again from vacuum with pump. This stream is mixed into feed stream of distillation column. Post coolers and valves decreases again in atmospheric temperature and pressure of Water- and Alcohol products [36]. The applied feed temperature in membrane modules is 70°C. Feed and permeate pressures are the following, 3 bar and 0.008 bar.

UNIQUAC thermodynamic model is applied in the case of SCDS distillation column and exponential Rautenbach model [4] for the hydrophilic pervaporation. Table 1 shows the estimated parameters of this semi empirical model [4].

The objectives function of optimization in the case of distillation are the minimal reflux ratio and number of

plates. Furthermore minimal membrane transfer area (A) and total annual cost (TAC) must be found. The methodology of Toth [40] and Douglas equations [41] are used for cost estimation. Current M&S index is used, while pump costs are determined by industrial data. Membrane area-price function is determined on industrial data and used for the calculation of the capital costs of membrane modules [23, 36]. 2.5 years are taken as membrane depreciation time, because membranes should be usually replaced in approximately every 2-5 years. 10-year amortization of capital cost is assumed for the total cost estimation [23, 36].

3 Results and discussion

Results of simulations with distillation and hydrophilic pervaporation process are listed in Table 2. Actually, Table 2 includes the optimized input and output compositions and streams of methods. The feed concentration of distillation is the recycled stream.

The column has 10 theoretical plates and the reflux ratio is 2 in the optimized case. 70 m² effective membrane transfer area is required for 99.5 % (m/m) of ethanol. It can be seen the bottom product of distillation is nearly 70% of the feed and the retentate is more than 90% of the feed stream of PV. Figure 2 shows the progression of retentate alcohol concentrations in membrane modules.

The process design and the evaluation of the design alternatives need to be evaluated for the energy demands at the different separation steps [36]. Table 3 shows the calculated heat duties. It can be seen that the reboiler of distillation column has the highest energy requirement and the post cooler is almost significant, this is consistent with the material streams.

Table 1. Estimated parameters for ethanol–water mixture with Sulzer PERVAP™ 4510 membrane [4]

	Water	Ethanol
Permeability coefficient [kmol/m ² hbar]	10 ⁸	10 ⁸
Transport coefficient [kmol/m ² h]	0,000202	1,93*10 ⁻⁵
Activation energy [kJ/kmol]	77877	128572
Exponential parameter [-]	2.63	-8.68

Table 2. Optimized results of ethanol-water separation

	Distillation			Pervaporation	
	F	W	D	P	R
EtOH [m/m%]	29	0.5	93	1	99.5
Water [m/m%]	71	99.5	7	99	0.5
Stream [kg/h]	816	562	254	16	233

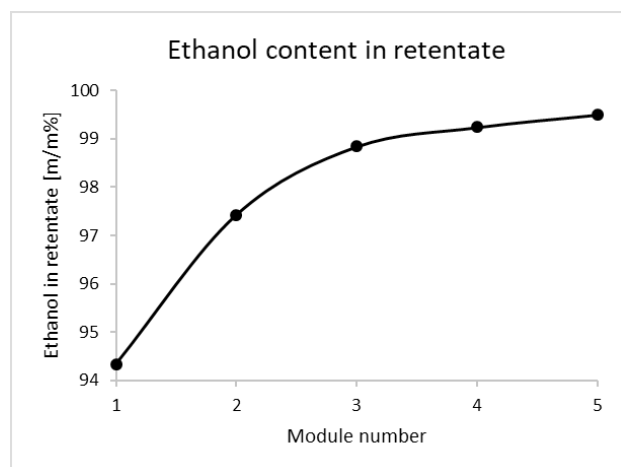


Figure 2. Ethanol weight percent in retentate

The conceptual design of an industrial process takes a small part of the project costs but offers a huge cost reduction opportunity for the whole project [36], therefore this hybrid operation should be investigated also from an economic point of view. Table 4 presents the main cost elements of hybrid operation. The cost of feed preheating, retentate heating and post coolers are summarized and nominated as Heat exchangers in Table 4 [36].

It can be concluded that the biggest part of investment cost is membrane modules and heat-energy is the most significant part of operating cost.

4 Conclusions

The combination of distillation and hydrophilic pervaporation is investigated in professional flowsheet environment. It can be concluded that the ethanol-water mixture can be separated into pure components with this hybrid operation. The simulations suggest that this separation process is able to remove the ethanol from pharmaceutical process wastewater. The target composition, which is 99.5 % (w/w) in both product case can be reached with 10 theoretical plate's distillation column and 70 m² effective membrane transfer area. Cost estimation is also justified the competitiveness of hybrid operation.

Acknowledgement: The authors would like to acknowledge the financial support of János Bolyai Research Scholarship of the Hungarian Academy of Sciences and OTKA 112699 project. This research was supported by the European Union and the Hungarian State, co-financed by the European Regional Development Fund in the framework of the GINOP-2.3.4-15-2016-00004 project, aimed to promote the cooperation between the higher education and the industry and the ÚNKP-17-3-I New National Excellence Program of the Ministry of Human Capacities.

Table 3. Calculated heat duties of hybrid operation

Calculated heat duties		Q_{Heating} [MJ/h]	Q_{Cooling} [MJ/h]
Distillation	Reboiler	461	
	Condenser		-152
	Post cooler		-310
Pervaporation	Feed preheating	17	
	Retentate heating	28	
	Permeate cooler		-31
	Post cooler		-13

Table 4. Cost elements of hybrid operation

10 years amortization	Investment cost		Operating cost		TAC
	1000\$/year	%	1000\$/year	%	
Distillation column	4.0	4	–	–	4.0
Heat exchangers	18.6	17	144.6	71	163.3
Membrane modules	80.5	75	18.0	9	98.5
Permeate cooling	3.9	4	41.3	20	45.1
Pumps	0.1	<0.5	0.4	<0.5	0.5
Total	107.1		204.3		311.4

Nomenclature

A	Membrane transfer area
D	Distillate product
EtOH	Ethanol
F	Feed
P	Permeate
PV	Pervaporation
R	Retentate
TAC	Total annual cost
PWW	Process wastewater
Q	Heat duty [MJ/h]
VOC	Volatile organic compounds
W	Bottom product weight percent m/m%

References

- [1] E. Favre, Temperature polarization in pervaporation, *Desalination* 154 (2003) 129-138.
- [2] A. Hasanoğlu, Y. Salt, S. Keleşer, S. Özkan, S. Dinçer, Pervaporation separation of ethyl acetate-ethanol binary mixtures using polydimethylsiloxane membranes, *Chemical Engineering and Processing: Process Intensification* 44 (2005) 375-381.
- [3] R. Rautenbach, C. Herion, U. Meyer-Blumentoth, Pervaporation membrane separation processes, *Membrane Science and Technology Series 1* (1990) 181-191.
- [4] N. Valentínyi, E. Cséfalvay, P. Mizsey, Modelling of pervaporation: Parameter estimation and model development, *Chemical Engineering Research and Design* 91 (2013) 174-183.
- [5] R.W. Baker, *Membrane Technology and Applications*, 3rd edition ed., Wiley, 2012.
- [6] A. Jonquière, R. Clément, P. Lochon, J. Néel, M. Dresch, B. Chrétien, Industrial state-of-the-art of pervaporation and vapour permeation in the western countries, *Journal of Membrane Science* 206 (2002) 87-117.
- [7] C.L. Hsueh, J.F. Kuo, Y.H. Huang, C.C. Wang, C.Y. Chen, Separation of ethanol-water solution by poly(acrylonitrile-co-acrylic acid) membranes, *Separation and Purification Technology* 41 (2005) 39-47.
- [8] K. Koczka, J. Manczinger, P. Mizsey, Z. Fonyo, Novel hybrid separation processes based on pervaporation for THF recovery, *Chemical Engineering and Processing: Process Intensification* 46 (2007) 239-246.
- [9] F. Lipnizki, R.W. Field, P.K. Ten, Pervaporation-based hybrid process: A review of process design, applications and economics, *Journal of Membrane Science* 153 (1999) 183-210.
- [10] K. Konieczny, M. Bodzek, D. Panek, Removal of volatile compounds from the wastewaters by use of pervaporation, *Desalination* 223 (2008) 344-348.
- [11] F. Lipnizki, S. Hausmanns, P.K. Ten, R.W. Field, G. Laufenberg, Organophilic pervaporation: Prospects and performance, *Chemical Engineering Journal* 73 (1999) 113-129.
- [12] A. Aroujalian, K. Belkacemi, S.J. Davids, G. Turcotte, Y. Pouliot, Effect of protein on flux and selectivity in pervaporation of ethanol from a dilute solution, *Separation Science and Technology* 38 (2003) 3239-3247.
- [13] V.S. Cunha, M.L.L. Paredes, C.P. Borges, A.C. Habert, R. Nobrega, Removal of aromatics from multicomponent organic mixtures by pervaporation using polyurethane membranes: Experimental and modeling, *Journal of Membrane Science* 206 (2002) 277-290.
- [14] S.B. Kuila, S.K. Ray, Sorption and permeation studies of tetrahydrofuran–water mixtures using full interpenetrating network membranes, *Separation and Purification Technology* 89 (2012) 39-50.
- [15] B. Smitha, D. Suhanya, S. Sridhar, M. Ramakrishna, Separation of organic–organic mixtures by pervaporation—a review, *Journal of Membrane Science* 241 (2004) 1-21.
- [16] T.Q. Nguyen, K. Nobe, Extraction of organic contaminants in aqueous solutions by pervaporation, *Journal of Membrane Science* 30 (1987) 11-22.
- [17] K.M. Devaine, A.J. Meier, C.S. Slater, Pervaporation for the recovery of MEK and other solvents using organophilic membranes, in: R. Bakish (Ed.) *Seventh International Conference on Pervaporation Process in the Chemical Industry*, Bakish Materials Corp., Reno, Nevada, 1995, pp. 218.
- [18] S.Q. Zhang, A.E. Fouda, T. Matsuura, A study on pervaporation of aqueous benzyl alcohol solution by polydimethylsiloxane membrane, *Journal of Membrane Science* 70 (1992) 249-255.
- [19] R.W. Baker, A.L. Athayde, R. Daniels, M. Le, I. Pinnau, J.H. Ly, J.G. Wijmans, J.H. Kaschemekat, V.D. Helm, *Development of Pervaporation to Recover and Reuse Volatile Organic Compounds from Industrial Waste Streams*, 1997.
- [20] L. Li, Z. Xiao, S. Tan, L. Pu, Z. Zhang, Composite PDMS membrane with high flux for the separation of organics from water by pervaporation, *Journal of Membrane Science* 243 (2004) 177-187.
- [21] A.J. Toth, F. Gergely, P. Mizsey, Physicochemical treatment of pharmaceutical wastewater: distillation and membrane processes, *Periodica Polytechnica: Chemical Engineering* 55 (2011) 59–67.
- [22] P. Mizsey, A.J. Toth, Application of the principles of industrial ecology for the treatment of process waste waters with physico-chemical tools, *Industrial Ecology* 1 (2012) 101–125.
- [23] K. Koczka, *Environmental conscious design and industrial application of separation processes*, PhD Thesis, BME, Budapest, 2009.
- [24] K. Koczka, P. Mizsey, New area for distillation: Wastewater treatment, *Periodica Polytechnica: Chemical Engineering* 54 (2010) 41-45.
- [25] H.J. Kim, S.S. Nah, B.R. Min, A new technique for preparation of PDMS pervaporation membrane for VOC removal, *Advances in Environmental Research* 6 (2002) 255-264.
- [26] P. Mizsey, K. Koczka, A. Tungler, Treatment of process waters with physicochemical techniques, *Hungarian Journal of Chemistry* 114 (2008) 107-113.
- [27] H.L. Fleming, C.S. Slater, *Pervaporation*, Springer, New York, 1992.
- [28] Q. Liu, R.D. Noble, J.L. Falconer, H.H. Funke, Organics/water separation by pervaporation with a zeolite membrane, *Journal of Membrane Science* 117 (1996) 163-174.
- [29] T.C. Bowen, H. Kalipcilar, J.L. Falconer, R.D. Noble, Pervaporation of organic/water mixtures through B-ZSM-5

- zeolite membranes on monolith supports, *Journal of Membrane Science* 215 (2003) 235-247.
- [30] P. Mizsey, A. Szanyi, A. Raab, J. Manczinger, Z. Fonyo, Intensification of a solvent recovery technology through the use of hybrid equipment, in: G. Johan, S. Jan van (Eds.) *Computer Aided Chemical Engineering*, Elsevier, 2002, pp. 121-126.
- [31] S. Li, V.A. Tuan, J.L. Falconer, R.D. Noble, Properties and separation performance of Ge-ZSM-5 membranes, *Microporous and Mesoporous Materials* 58 (2003) 137-154.
- [32] J.G. Wijmans, R.W. Baker, The solution-diffusion model: a review, *Journal of Membrane Science* 107 (1995) 1-21.
- [33] Z.K. Xu, Q.W. Dai, Z.M. Liu, R.Q. Kou, Y.Y. Xu, Microporous polypropylene hollow fiber membranes: Part II. Pervaporation separation of water/ethanol mixtures by the poly(acrylic acid) grafted membranes, *Journal of Membrane Science* 214 (2003) 71-81.
- [34] T. Mohammadi, A. Aroujalian, A. Bakhshi, Pervaporation of dilute alcoholic mixtures using PDMS membrane, *Chemical Engineering Science* 60 (2005) 1875-1880.
- [35] C. Marsden, *Solvents And Allied Substances Manual With Solubility Chart*, Cleaver-Hume and Elsevier, London, 1954.
- [36] A.J. Toth, A. Andre, E. Haaz, P. Mizsey, New horizon for the membrane separation: Combination of organophilic and hydrophilic pervaporations, *Separation and Purification Technology* 156 (2015) 432-443.
- [37] A.J. Toth, P. Mizsey, Methanol removal from aqueous mixture with organophilic pervaporation: Experiments and modelling, *Chemical Engineering Research and Design* 98 (2015) 123-135.
- [38] G.F. Tusel, H.E.A. Bruschke, Use of pervaporation systems in the chemical industry, *Desalination* 53 (1985) 327-338.
- [39] N. Valentínyi, P. Mizsey, Comparison of pervaporation models with simulation of hybrid separation processes, *Periodica Polytechnica: Chemical Engineering* 58 (2014) 7-14.
- [40] A.J. Toth, *Liquid Waste Treatment with Physicochemical Tools for Environmental Protection*, PhD Thesis, BME, Budapest, 2015.
- [41] J.M. Douglas, *Conceptual design of chemical processes*, McGraw-Hill, New York, 1988.